



DS SERIES

DS371BT4-1


37" High Brightness 3,000 nit Bar-type Display



SUNLIGHT
VIEWABLE IMAGE



32 : 9
ASPECT RATIO



BUILT-IN
MEDIA PLAYER



THERMAL
MANAGEMENT



TRUECOLOR™
CALIBRATED

FOR MORE INFORMATION

For more information about DynaScan, visit our site at www.dynascan.com. Copyright © DynaScan Technology Inc. All rights reserved. All specifications and descriptions are subject to change without notice. Reproduction without permission is prohibited.



DynaScan

SPECIFICATION


MODEL	DS371BT4-1	
PANEL	LCD Panel Size	37 inches LCD
	Native Resolution	1920 x 540 (32 : 9)
	Brightness	3000 nits
	Color Depth	8 bits
	Contrast Ratio	4000:1
	Response Time (Typ.)	16 ms
	Viewing Angle	178° / 178°
	Light Lifetime (Typ.)	50,000 hrs
POWER	Power Supply	Internal
	Rated Voltage	100-240V ~ 50/60HZ
	Power Consumption (Typ./ Max.)	95 W / 145 W
	Power Saving Mode	< 1 W
MECHANICAL SPECS	Bezel Width (T/B/L/R)	11.7 / 11.7 / 5.6 / 5.6 mm
	Cabinet Color	Black
	Monitor Dimension (LxHxD)	914.9 x 280.8 x 51.5 mm
	Monitor Weight	9.0 kg
	Orientation	Portrait / Landscape
	VESA Mounting (LxH)	200 x 100 mm
USER INTERFACE	Language	English
	Built-in Video Wall Support	Up to 15 x 15
	Support SNMP (Up to V3.0)	Yes
	Dimming Control	Yes
	Image Retention Protection	Yes
	Auto Orientation Sensor	Yes
	Ambient Light Sensor	Yes
	Power On/Off Scheduling	Yes
	Internal Temperature Sensor	Yes
	OSD Menu Rotation	Yes
INPUT	HDMI	x1 (1080p)
	DVI-D	x1
	DisplayPort	x1
	USB	x1 (For Internal Player)
	SD Slot	x1 (For Internal Player)
OUTPUT	DVI-D	x1
	Audio	x1
EXTERNAL CONTROL	RS-232	In x1, Out x1
	RJ-45	x1 (LAN)
INTERNAL PLAYER	Operating System	Android 4.4.2
	Processor	ARM Quad-Core Cortex-A9
	Clock Speed	1.6 GHz
	Main Memory Interface	DDR3L-1066, 1GB
	Graphics	Mali400MP4, support OpenGL ES1.1/2.0, Open VG1.1
	Storage	Internal: Nand flash 8GB(multi sources) External: Support SD , Up to 32GB
ENVIRONMENT	Multimedia	Multi-format 1080P video decoders (H.264,VC-1, MPEG-1/2/4, H.263, H.264 MVC, AVS, VP8/6, RV)
	Operating Temperature	0° ~ 40° C
	Storage Temperature	-20° ~ 60° C
	Humidity	10% ~ 80% RH Non-condensing
CERTIFICATION	CE / FCC / RoHS	

DIMENSIONS

Unit: mm [inch]

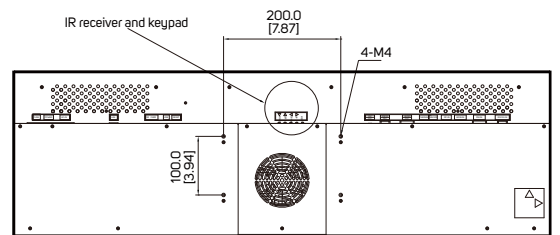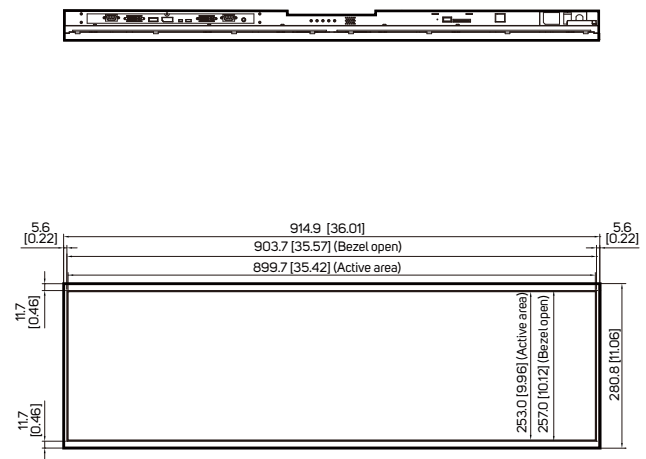

INTERFACE

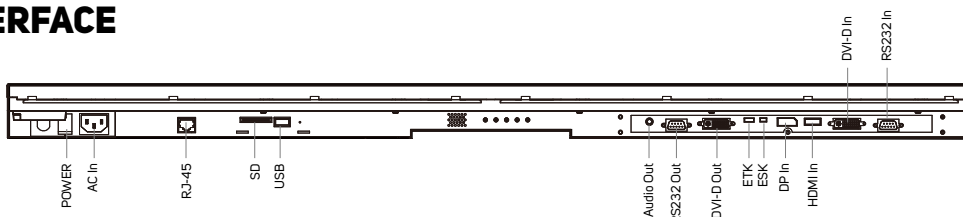

FOR MORE INFORMATION

For more information about DynaScan, visit our site at www.dynascan.com. Copyright © DynaScan Technology Inc. All rights reserved. All specifications and descriptions are subject to change without notice. Reproduction without permission is prohibited.

DynaScan