



DK SERIES

DK751DN5


75" 4000 nits UHD Dual-sided Outdoor Kiosk




DUAL-SIDED
DESIGN



SUNLIGHT
VIEWABLE IMAGE



LOW POWER
CONSUMPTION



VIEWABLE WITH
POLARIZED LENSES



WEATHER
PROOF

FOR MORE INFORMATION


For more information about DynaScan, visit our website at www.dynascandisplay.com. Copyright © DynaScan Technology Inc. All rights reserved. All specifications and descriptions are subject to change without notice. Reproduction without permission is prohibited.

DynaScan

SPECIFICATION

MODEL	DK751DN5	
DISPLAY	LCD Panel Size	74.52" inches LCD (x2)
	Native Resolution	3840 x 2160
	Brightness	4,000 nits
	Light Lifetime (Typ.)	100,000 hrs
	Contrast Ratio	3000 : 1
	Color Depth	10 bits
	Response Time (Typ.)	8 ms
	Viewing Angle	178° / 178°
	Polarized Sunglasses Support	Yes
	Touch Function (Optional)	P-Cap touch
POWER	Power Supply	Internal
	Rated Voltage	200-240V ~ 50/60HZ
	Power On Mode (Typ./ Max)	850W / 1850W
MECHANICAL SPECS	Bezel Width (T/B/L/R)	97.6 / 137.6 / 122.1 / 122.1 mm
	Cabinet Color	Black
	Dimension (LxHxD, w/o stand)	1175.7 x 1962.1 x 250.0 mm
	Weight	415 kg
	Orientation	Portrait
	Reserved Space for Optional Player	Yes
	High Security Lock	Yes
USER INTERFACE	Language	English
	Support SNMP (Up to V3.0)	Yes
	Local Dimming Control	Yes
	Ambient Light Sensor	Yes
	Power On/Off Scheduling	Yes
	Internal Temperature Sensor	Yes
	Backup Player Build-in	Yes
INPUT	HDMI	x6 (2160p)
	Display Port	x2
	USB 3.0	x2
	Micro SD Slot	x2
OUTPUT	Audio	x2
EXTERNAL CONTROL	RS-232	In x2
	RJ-45	x4 (LAN)
INTERNAL PLAYER	Operating System	Android 8.0.0
	Processor	Dual-core A73 and dual-core A53
ENVIRONMENT	Operating Temperature	-30° C ~ 50° C
	Storage Temperature	-20° C ~ 60° C
	Humidity	10% ~ 100% RH Non-condensing
	Environmental Rating	IP56 / IK10 / ASTM G155
CERTIFICATION	CE / FCC / UL / ROHS	

DIMENSIONS

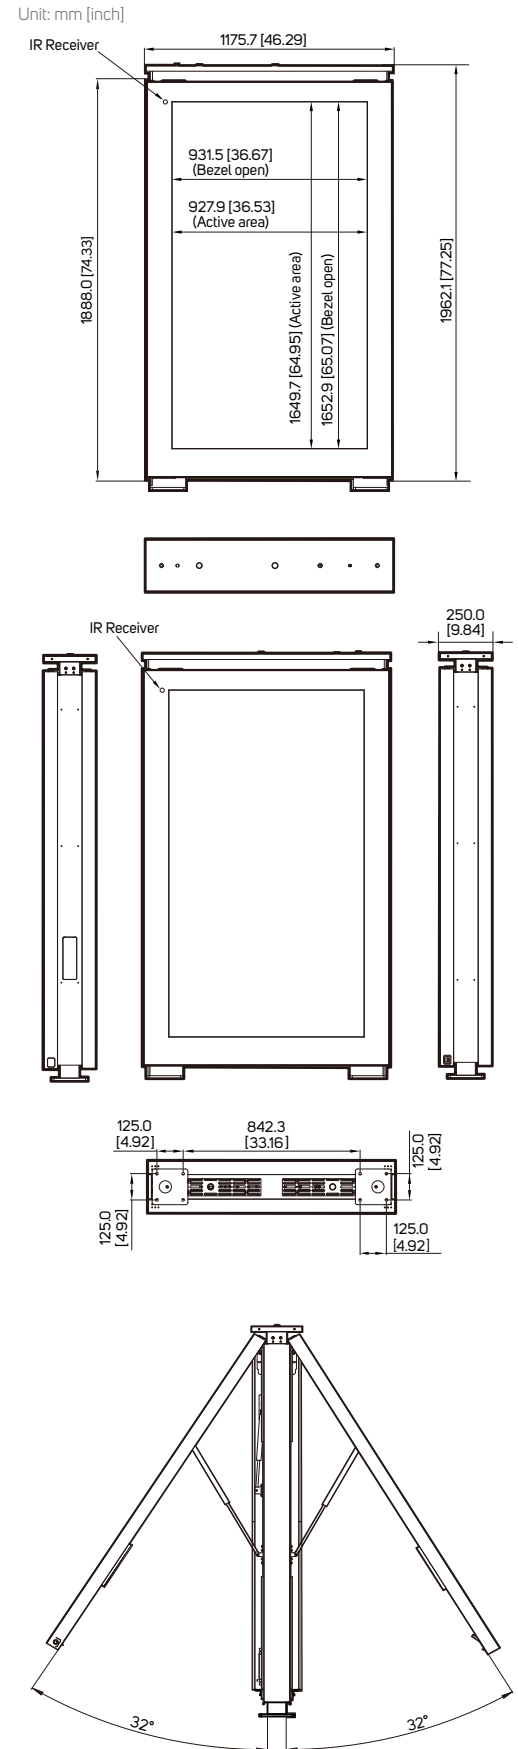

FOR MORE INFORMATION

For more information about DynaScan, visit our website at www.dynascandisplay.com. Copyright © DynaScan Technology Inc. All rights reserved. All specifications and descriptions are subject to change without notice. Reproduction without permission is prohibited.

DynaScan