



DK SERIES

# DK862DH4


86" 3500 nits 4K UHD Outdoor Ultra-High Brightness Hybrid Kiosk with Light Box




HYBRID  
DIGITAL & STATIC



VANDAL  
RESISTANT



SUNLIGHT  
VIEWABLE IMAGE



SMART  
LIGHT BOX



WEATHER  
PROOF

## FOR MORE INFORMATION

For more information about DynaScan, visit our website at [www.dynascan.com](http://www.dynascan.com). Copyright © DynaScan Technology Inc. All rights reserved. All specifications and descriptions are subject to change without notice. Reproduction without permission is prohibited.






# DynaScan

# SPECIFICATION

<b>MODEL</b>	DK862DH4	
<b>DISPLAY</b>	LCD Panel Size	85.6 inches LCD (x1)
	Native Resolution	3840 x 2160
	Brightness (w/o glass)	3,500 nits
	Light Lifetime (Typ.)	100,000 hrs
	Color Depth	10 bits
	Contrast Ratio	3000 : 1
	Response Time (Typ.)	8 ms
	Viewing Angle	178° / 178°
	Polarized Sunglasses Support	Yes
	Touch Function (Optional)	P-Cap touch
<b>LIGHT BOX</b>	Bezel Width (T/B/L/R)	192.5 / 192.5 / 89.0 / 89.0 mm
	Poster Size (WxH)	1200 × 1800 mm
	Kiosk Visual Opening (WxH)	1160.0 x 1710.0 mm
<b>POWER</b>	Power Supply	Internal
	Rated Voltage	200-240V ~ 50/60Hz
	Power On Mode (Max.)	1470 W
<b>MECHANICAL SPECS</b>	Digital Side Bezel Width (T/B/L/R)	84.7 / 112.2 / 134.4 / 134.4 mm
	Cabinet Color	Black
	Dimension (WxHxD, w/o stand)	1338.0 x 2100.0 x 250.0 mm
	Weight	350 kg
	Orientation	Portrait
	Glass	Yes
	Air Vent	Yes
	Language	English
	Support SNMP (Up to V3.0)	Yes
	Dimming Control	Yes
<b>USER INTERFACE</b>	Image Retention Protection	Yes
	Ambient Light Sensor	Yes
	Power On/Off Scheduling	Yes
<b>INPUT</b>	HDMI	x3 (2160p)
	USB 3.0	x1
	Micro SD Slot	x1
<b>OUTPUT</b>	Audio	x1
	RS-232	In x1
<b>EXTERNAL CONTROL</b>	RJ-45	x2 (LAN)
	Operating System	Android 11.0
<b>INTERNAL PLAYER</b>	Processor	Cortex-A73
	Clock Speed	1.8GHz
	Main Memory Interface	DDR4, 4G
	Graphics	Mali-G52
	Storage	Internal: 16GB eMMC Flash External: Support Micro SD , Up to 128GB(FAT32/NTFS)
	Multimedia	4K 10bits VP9/H265/H264 video decoders, up to 60fps 1080P other video decoders (VC-1, MPEG-1/2/4, VP8)
	Operating Temperature	-30°~ 50° C
	Storage Temperature	-20°~ 60° C
	Humidity	5% ~ 95% RH Non-condensing
	Water and Dust resistant design	IP56
<b>CERTIFICATION</b>	CE / FCC / IEC60950-22 / RoHS	

# DIMENSIONS

Unit: mm [inch]

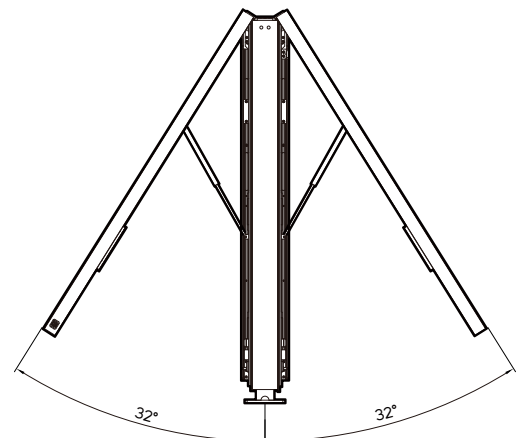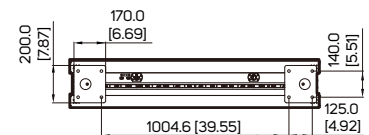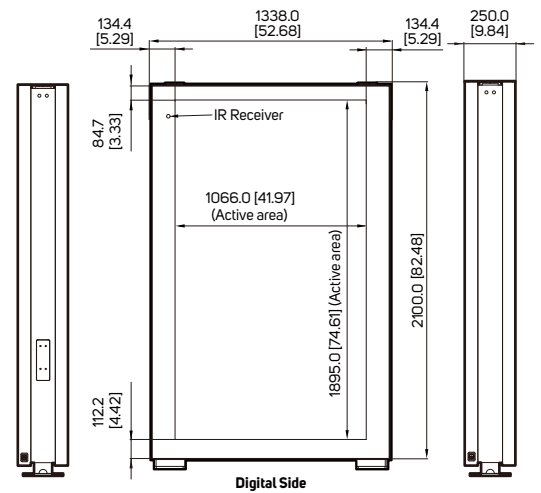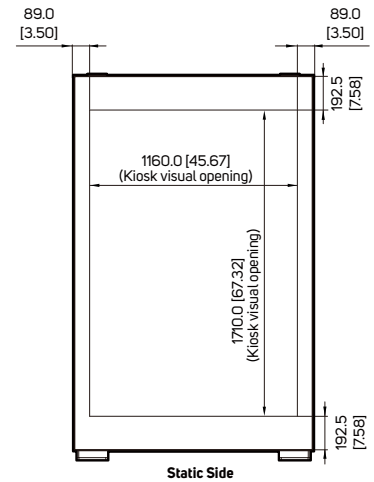

## FOR MORE INFORMATION

For more information about DynaScan, visit our website at [www.dynascan.com](http://www.dynascan.com). Copyright © DynaScan Technology Inc. All rights reserved. All specifications and descriptions are subject to change without notice. Reproduction without permission is prohibited.

**DynaScan**