


EPD SERIES

NAVO 13

13" ePaper Display

NV13A



RECYCLED &
RECYCLABLE
MATERIALS




ULTRA
LIGHT & THIN



FLAME
RETARDANT



DIGITAL
BENEFIT



ULTRA-LOW
POWER

FOR MORE INFORMATION

For more information about DynaScan, visit our website at www.dynascan.com. Copyright © DynaScan Technology Inc. All rights reserved.
All specifications and descriptions are subject to change without notice. Reproduction without permission is prohibited.

DynaScan




V1.10

SPECIFICATION

MODEL	NV13A	
PANEL	Size	13.3 inches
	PPI	150
	Resolution	1600 x 1200 px
	Pixel Pitch	0.169 x 0.169 mm
	Active Display Area (H x V)	199.8 x 267.4 mm
	Contrast Ratio	22:1
	Display Colors	60,000
	Operation Hours	24/7
POWER	Update Time (Typ.)	15s
	Panel Surface	Anti Glare
BATTERY COMPATIBILITY*	Rated Voltage	DC 5V/ 2A
	Power Consumption (Max)	3W
	Type	10440 lithium battery x4*
MECHANICAL SPECS	Rated Voltage	3.7V
	Recommended Capacity	>300mAh
	Dimension	310.5 x 223.0 x 17.5 mm
	Weight	500g (TBC)
	Hanging Point	Yes x 4
	Bezel Width (T/B/L/R)	11.6 / 11.6 / 21.6 / 21.6 mm
	Color	Black, White
	Protection Glass	N/A
USER INTERFACE	VESA Mounting (L x H)	100 x 100 mm
	Orientation	Portrait / Landscape
	Language	English
INPUT	Support SNMP (Up to V3.0)	Yes
	Power On/Off Scheduling	Yes
	USB Type-C	x2 (1x for data; 1x for power supply)
INTERNAL PLAYER	USB Type Mini-A	x1 (for Wi-charge receiver) [option]
	Operating System	Android 11
	Clock Speed	2.0GHz
	Graphics	ARM Mail-G52
	Storage	4GB RAM
		32GB eMMC flash
	BLE	BT 5.0 Module
	Wi-Fi Specification	802.11 a/b/g/n/ac/ax
ENVIRONMENT	Operating Temperature	0°~ 50°C
	Storage Temperature	-25°~ 60°C
	Humidity	20%~80% RH Non-condensing
CERTIFICATION	CE / FCC / CB / PSE / UL 62368 / VCCI / BLE / WIFI / ETL / RoHS 2.0	

DIMENSIONS

Unit: mm [inch]

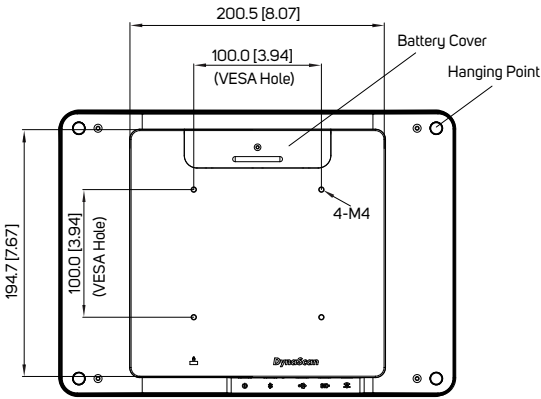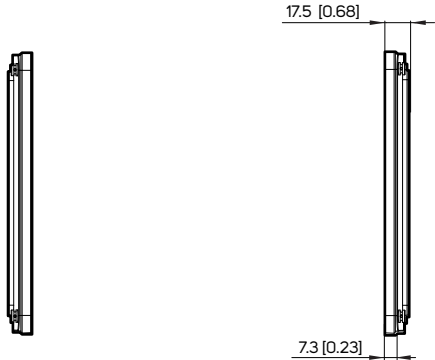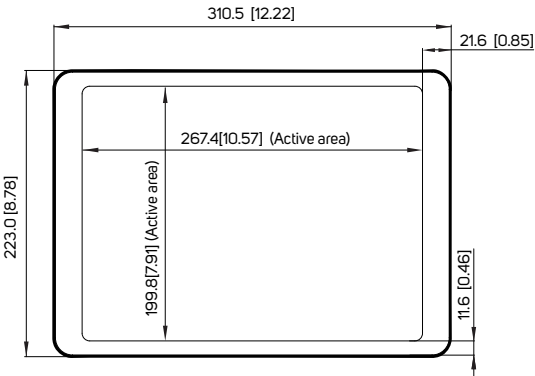

INTERFACE

