


EPD SERIES

NVA2A

28.5" ePaper Display

NVA2A



RECYCLED &
RECYCLABLE
MATERIALS




ULTRA
LIGHT & THIN



ANTI-UV
GLASS



DIGITAL
BENEFIT



ULTRA-LOW
POWER

FOR MORE INFORMATION

For more information about DynaScan, visit our website at www.dynascan.com. Copyright © DynaScan Technology Inc. All rights reserved.
All specifications and descriptions are subject to change without notice. Reproduction without permission is prohibited.

DynaScan




V1.03

SPECIFICATION

MODEL	NVA2A	
PANEL	Size	28.54 inches
	PPI	131
	Resolution	3060 x 2160
	Pixel Pitch	0.1935 x 0.1935 mm
	Active Display Area (H x V)	589.2 x 415.0 mm
	Contrast Ratio	22:1
	Display Colors	60,000
	Operation Hours	24/7
POWER	Update Time (Typ.)	21s
	Panel Surface	Anti Glare
BATTERY	Rated Voltage	DC 12V / 2.5A
	Power Consumption (Max)	6W
BATTERY COMPATIBILITY*	Type	18650 lithium battery
	Rated Voltage	3.7V
	Recommended Capacity	>3,000mAh
MECHANICAL SPECS	Dimension	626.20 x 452.0 x 28 mm
	Weight	2.265 kg (TBC)
	Hanging Point	Yes x 4
	Bezel Width (T/B/L/R)	18.5 / 18.5 / 18.5 / 18.5 mm
	Color	Black & Black, White & White
	VESA Mounting (L x H)	200 x 200 mm
	Orientation	Portrait / Landscape
USER INTERFACE	Language	English
	Support SNMP (Up to V3.0)	Yes
	Power On/Off Scheduling	Yes
INPUT	USB Type-C	x2(for data x1 ; for power supply & datax1)
	Mini USB	x1 for Wi-charge receiver
INTERNAL PLAYER	Operating System	Android 11
	Clock Speed	2.0GHz
	Graphics	ARM Mail-G52
	Storage	4GB RAM
		32GB eMMC flash
	Bluetooth	5.3 compliant
ENVIRONMENT	Wireless LAN	IEEE802.11a/b/g/n/ac/ax compliant
	Operating Temperature	with Battery 0°~ 45°C, w/o Battery 0°~ 50°C
	Storage Temperature	-25°~ 60°C
CERTIFICATION	Humidity	20%~80% RH Non-condensing

DIMENSIONS

Unit: mm [inch]

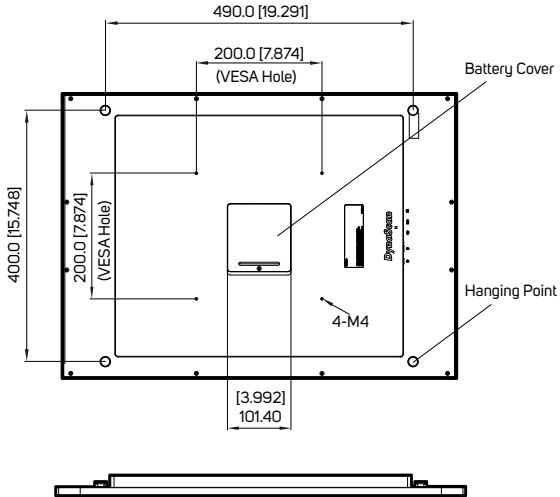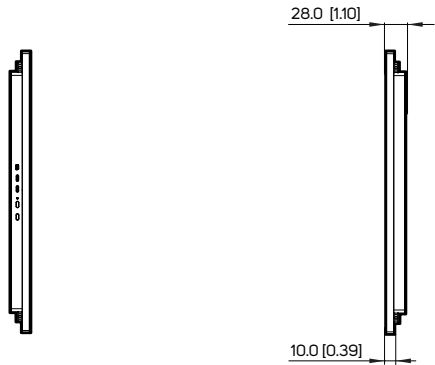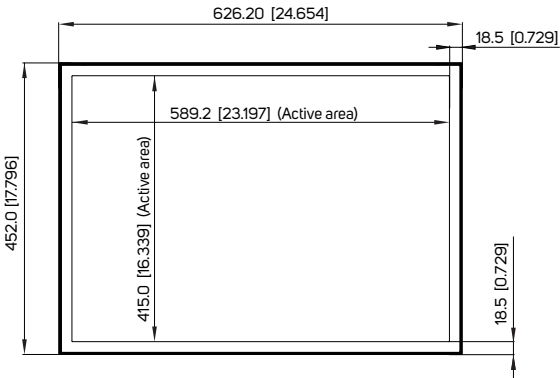

INTERFACE

