

EPAPER SERIES

NAVO A2

A2 Color ePaper Display

NVA2A



RECYCLED &
RECYCLABLE
MATERIALS




ULTRA
LIGHT & THIN



FLAME
RETARDANT



DIGITAL
BENEFIT



ULTRA-LOW
POWER

FOR MORE INFORMATION

For more information about DynaScan, visit our website at www.dynascan.com. Copyright © DynaScan Technology Inc. All rights reserved. All specifications and descriptions are subject to change without notice. Reproduction without permission is prohibited.





DynaScan

SPECIFICATION

MODEL	NVA2A	
PANEL	Size	28.54 inches
	PPI	131
	Resolution	3060 x 2160
	Pixel Pitch	0.1935 x 0.1935 mm
	Active Display Area (H x V)	589.2 x 415.0 mm
	Contrast Ratio	22:1
	Display Colors	60,000
	Operation Hours	24/7
	Update Time (Typ.)	21s
	Panel Surface	Anti Glare
POWER	Rated Voltage	DC 12V / 2.5A
	Power Consumption (Max)	6W
BATTERY COMPATIBILITY*	Type	18650 lithium battery
	Rated Voltage	3.7V
	Recommended Capacity	>3,000mAh
MECHANICAL SPECS	Dimension	628.1 x 453.9 x 28.0 mm
	Weight	2.4 kg
	Hanging Point	Yes x 4
	Bezel Width (T/B/L/R)	18.5 / 18.5 / 18.5 / 18.5 mm
	Color	Black & Black, White & White
	VESA Mounting (L x H)	200 x 200 mm
	Orientation	Portrait / Landscape
USER INTERFACE	Language	English
	Support SNMP (Up to V3.0)	Yes
	Power On/Off Scheduling	Yes
INPUT	USB Type-C	x2 (for data x1; for power supply & datax1)
INTERNAL PLAYER	Operating System	Android 11
	Clock Speed	2.0GHz
	Graphics	ARM Mail-G52
	Storage	4GB RAM 32GB eMMC flash
	Bluetooth	5.3 compliant
	Wireless LAN	IEEE802.11a/b/g/n/ac/ax compliant
ENVIRONMENT	Operating Temperature	with Battery 0°~ 40°C, w/o Battery 0°~ 45°C
	Storage Temperature	-25°~ 60°C
	Humidity	20%~80% RH Non-condensing
CERTIFICATION	CE / FCC / CB / PSE / LVD / ISED / ETL / RoHS 2.0 / RCM / Bluetooth	

DIMENSIONS

Unit: mm [inch]

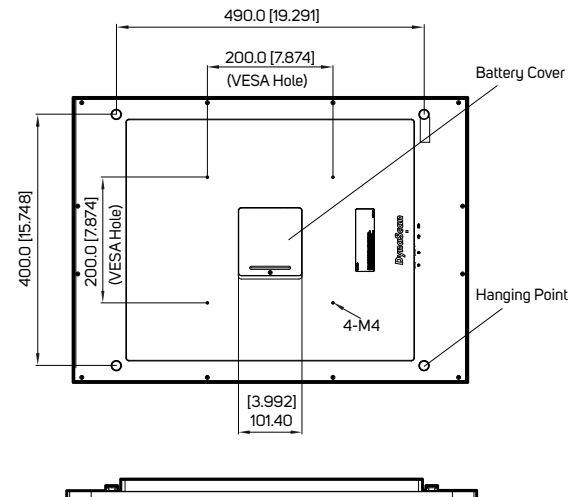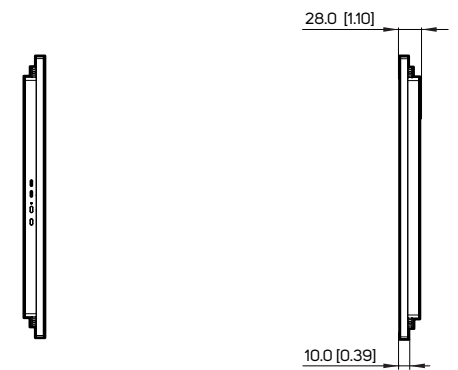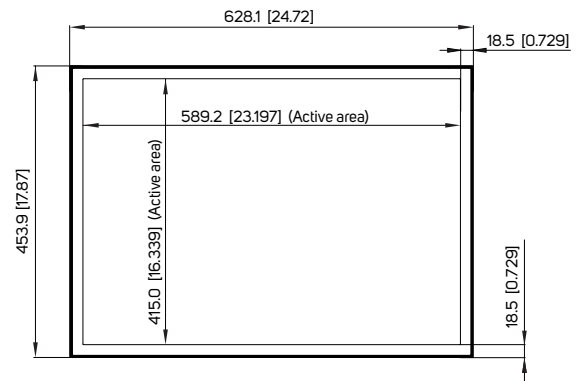

INTERFACE

